



# Flame Detector Types



*keep an Eye on your safety*




# Optical Flame Detection

General method:


- ❑ Detecting the unique optical characteristics of flames
- ❑ Distinguishing between flame radiation and background radiation



*keep an Eye on your safety*

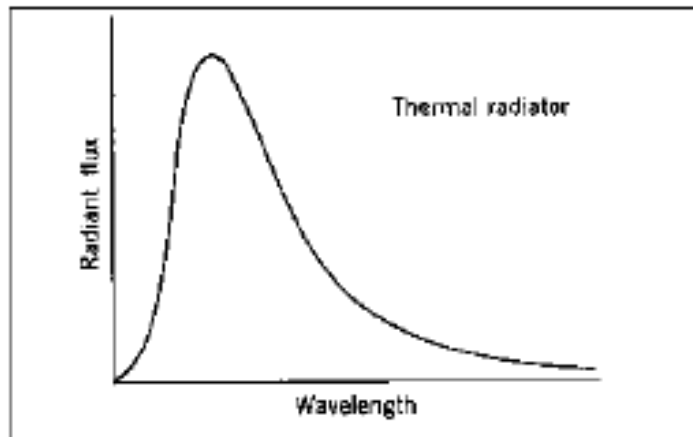


- Heated solids & liquids provide continuous spectral distribution curve

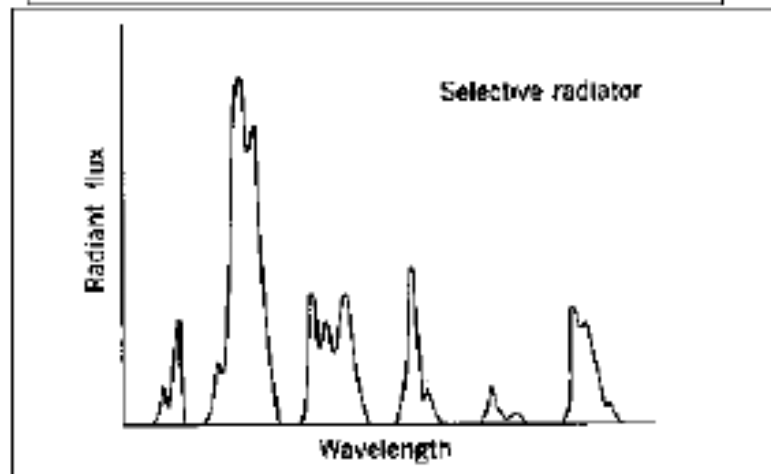

- Flames & electrical discharges provide narrow distribution characteristic of molecule type


*keep an Eye on your safety*

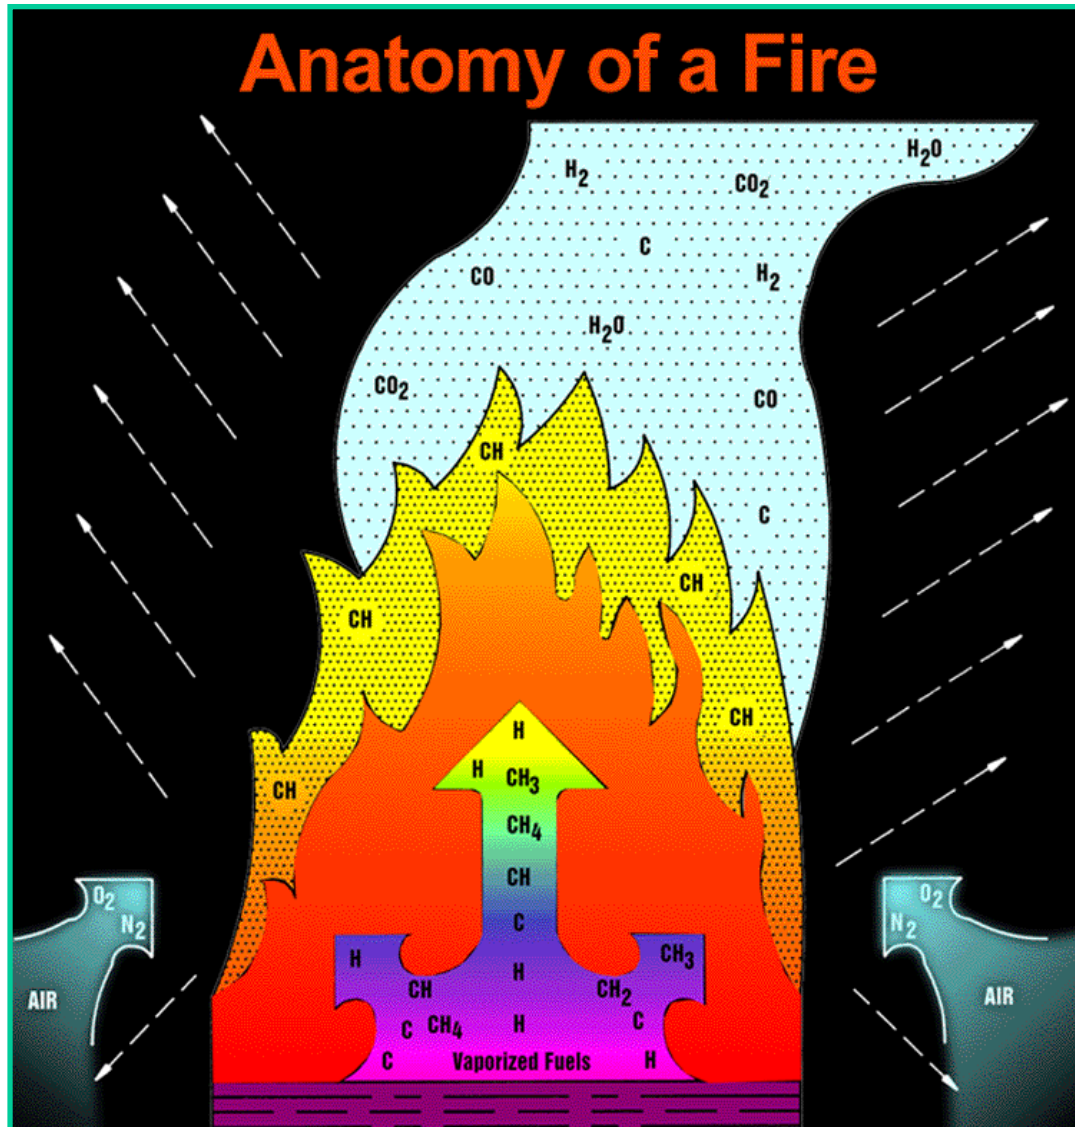

Main reaction is  
 $\text{HC} + \text{O}_2 = \text{CO}_2 + \text{H}_2\text{O}$

*keep an Eye on your safety*

## Flame Radiation Spectrum

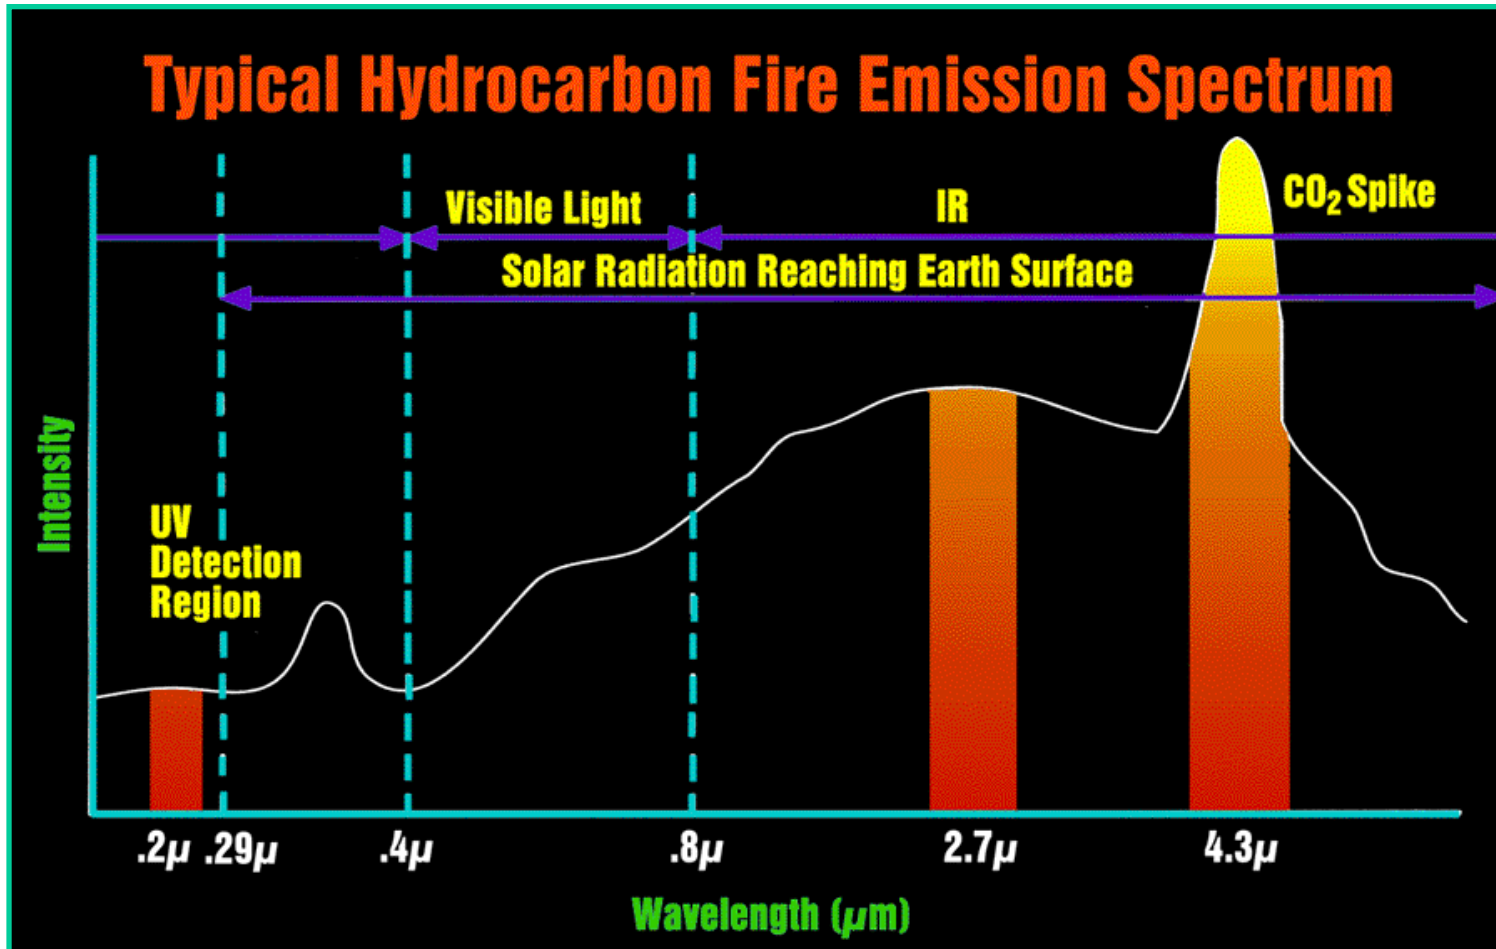

1-10 Hz Characteristic Flickering

*keep an Eye on your safety*




The part that we can see is mostly red-yellow caused by the Carbon in a fire.

The invisible IR part of the fire we experience as **heat**.

Non-Hydrocarbons e.g. Hydrogen, burns **light blue-transparent** (no Carbon in the flame).

It also does not have the CO<sub>2</sub> peak at 4.4 $\mu$  and can therefore be detected in a different way

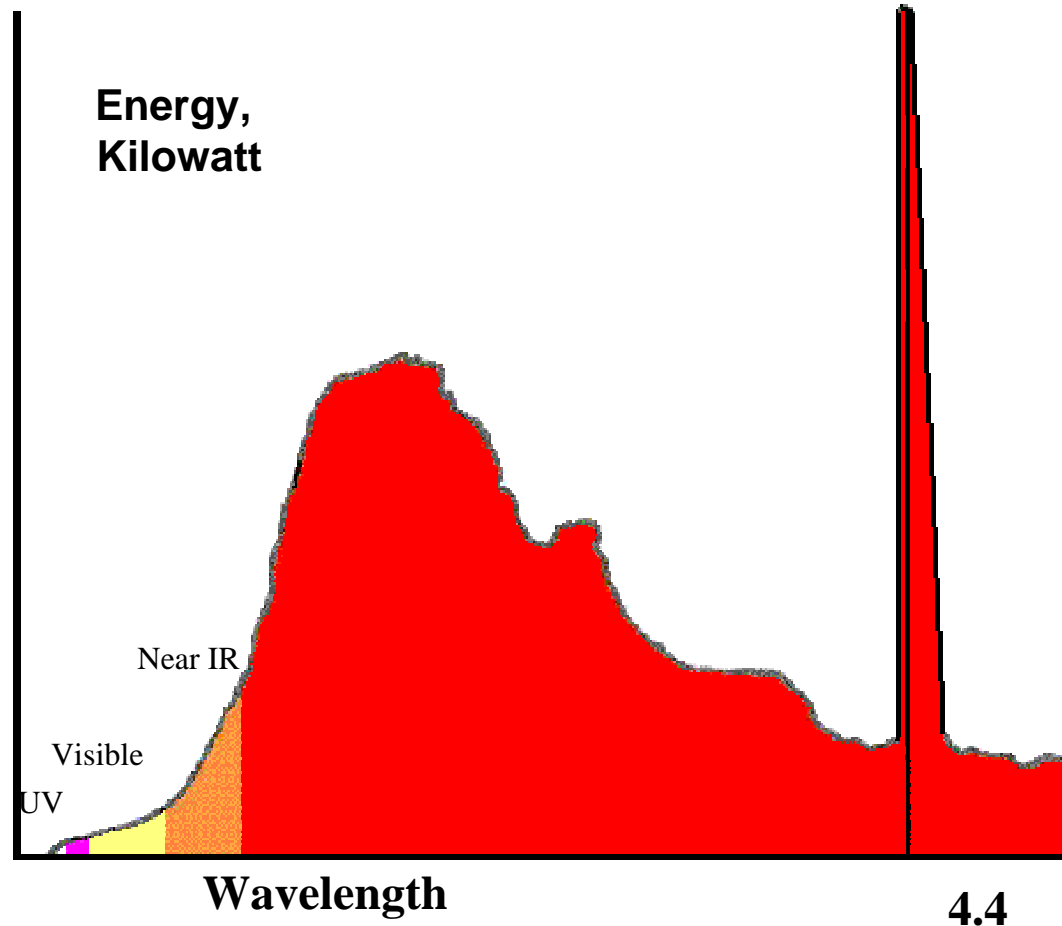


*keep an Eye on your safety*



The CO<sub>2</sub> peak in the fire represents less than 2% of the total fire energy.

A multi sensor Flame Detector has much more sensor input and can therefore be more specific or less effected by false alarms.

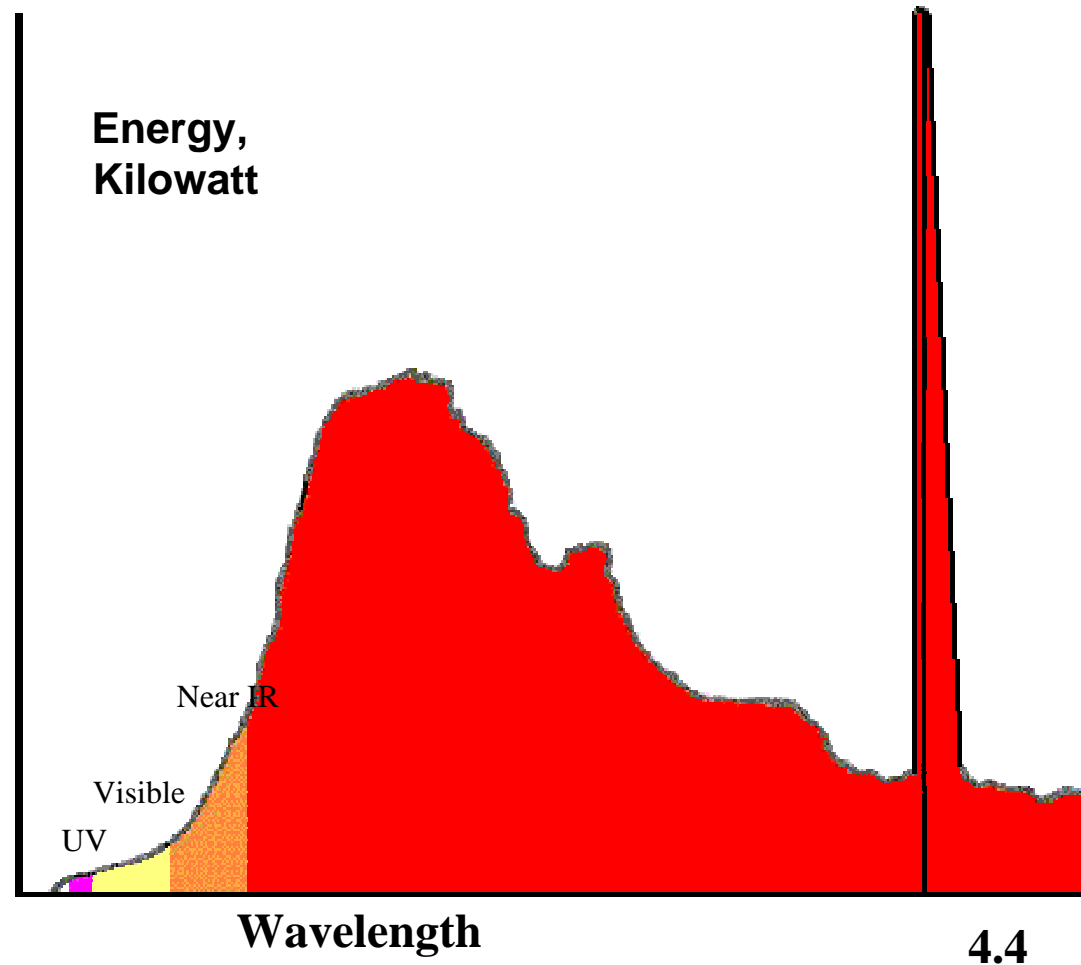




*keep an Eye on your safety*



## Black Body Radiation

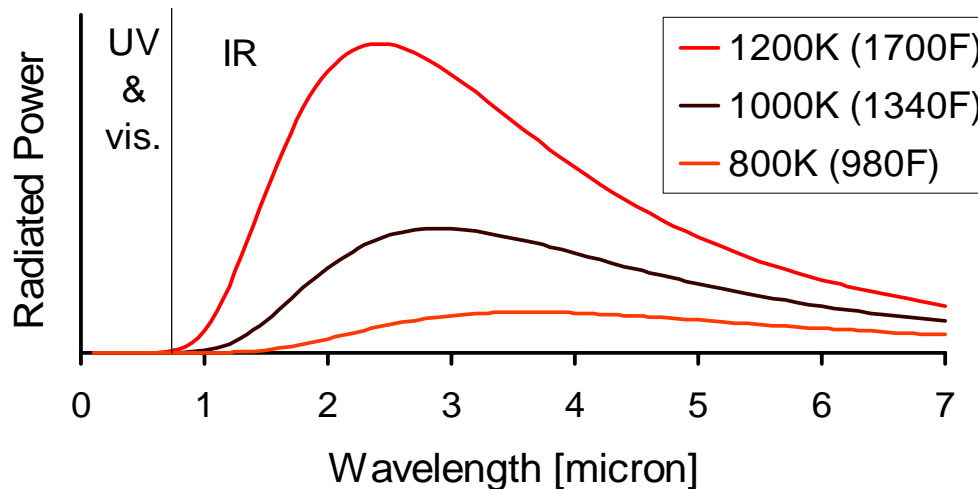

Infrared sensors are also effected by Infrared Radiation not from a fire. The fire may be masked by this Blackbody Radiation.

Dual or Multi Infrared detectors suppress the effects of Blackbody Radiation by sensing energy just beside the CO<sub>2</sub> radiation peak e.g. on 4.1 $\mu$ m. The principle works on the fact that a real Hydrocarbon fire causes a difference between the sensors.

There must be a larger difference in sensor output than the background radiation present. In other words, the detector can be desensitized when Blackbody Radiation is present.

Every object that has a temperature higher than 0<sup>o</sup> Kelvin (or -273 <sup>o</sup>C) radiates energy and, at room temperature, the energy is already detectable by the most sensitive Infrared sensors. Sometimes, a moving hand close to the sensor is enough to generate an alarm. At 700 K, a hot object already starts to send out visible energy (glowing).



*keep an Eye on your safety*




## Potential "False Alarm" sources

### ➤ The Sun

- High Intensity
- Unique Radiation Peaks

The Sun radiates an enormous amount of energy. However, most gases and vapour in the atmosphere (clouds and ozone) absorb enough radiation to protect us.

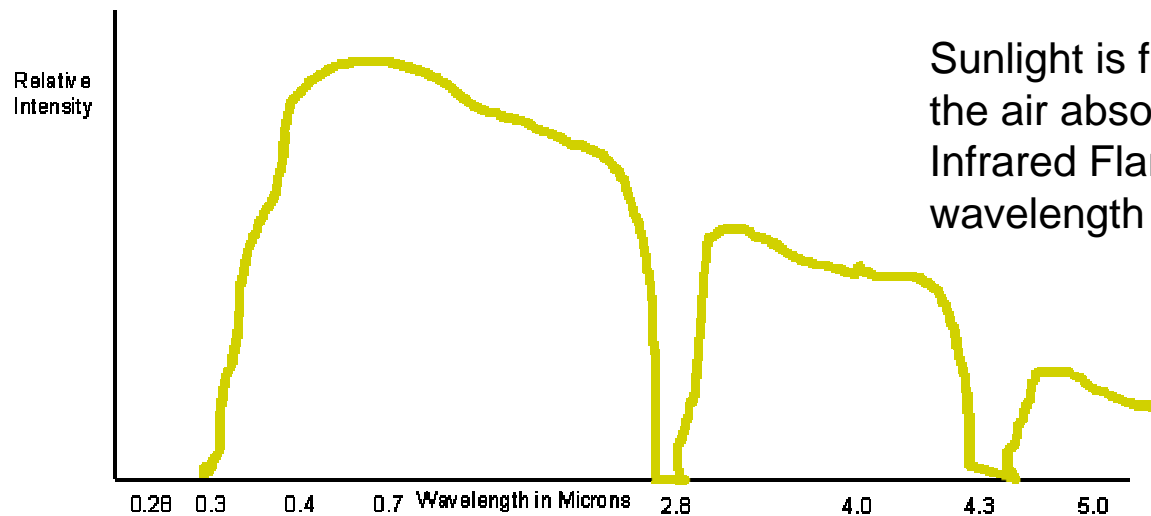

Sunlight is filtered around 4.4 $\mu$ . Cold CO<sub>2</sub> in the air absorbs 4.4 $\mu$  energy and therefore Infrared Flame detectors that use 4.4 $\mu$  wavelength are Solar blind.

*keep an Eye on your safety*




## Potential "False Alarm" sources

### ➤ **Heat Sources** Radiators, electrical heaters, etc.

- No UV, weak Visible, and medium IR radiation
- Stable radiation

### ➤ **Arc** Lightning, Welding etc.

- High Intensity UV radiation
- Weak IR radiation
- Unstable radiation (similar to the fire's flicker)

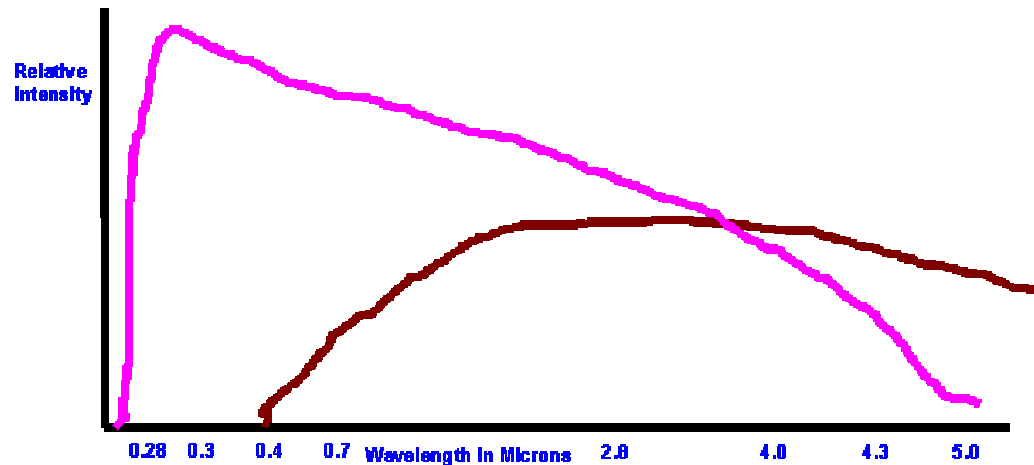


*keep an Eye on your safety*



## Potential "False Alarm" sources:

- **Environment:** man, the surrounding area, and other "warm" objects
  - Medium intensity IR radiation (like a std. fire at 30m)
  - Negligible UV radiation (assuming no High Voltage transformers nearby)
  - Stable radiation
  
- **Light Sources:** Tungsten, Halogen, Mercury etc.
  - High Intensity Visible Light, Weak IR (1 to 10% std. fire)
  - Medium Intensity UV radiation (for unshielded halogen lamps ( $\approx 10\%$  std. fire))
  - Stable radiation (except when turning power on and off)

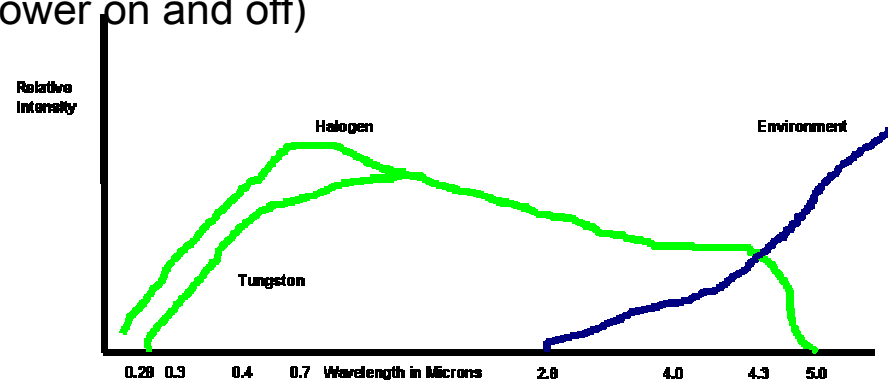

*keep an Eye on your safety*




## Potential false alarm sources:

### ➤ “Friendly Fire”:

Matches, Acetylene welding, flux burning in arc welding etc.

- Fire-like IR emission spectrum
- Usually higher intensity UV radiation than fire
- Low IR intensity radiation
- Unstable radiation

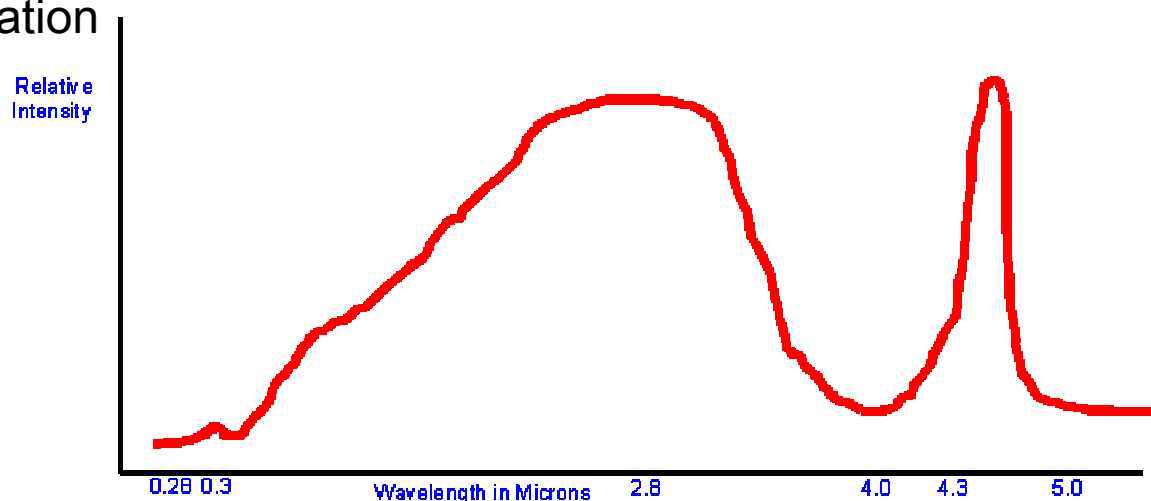


*keep an Eye on your safety*



## Flame Spectral Analysis

Three major spectral areas for Flame Detection :

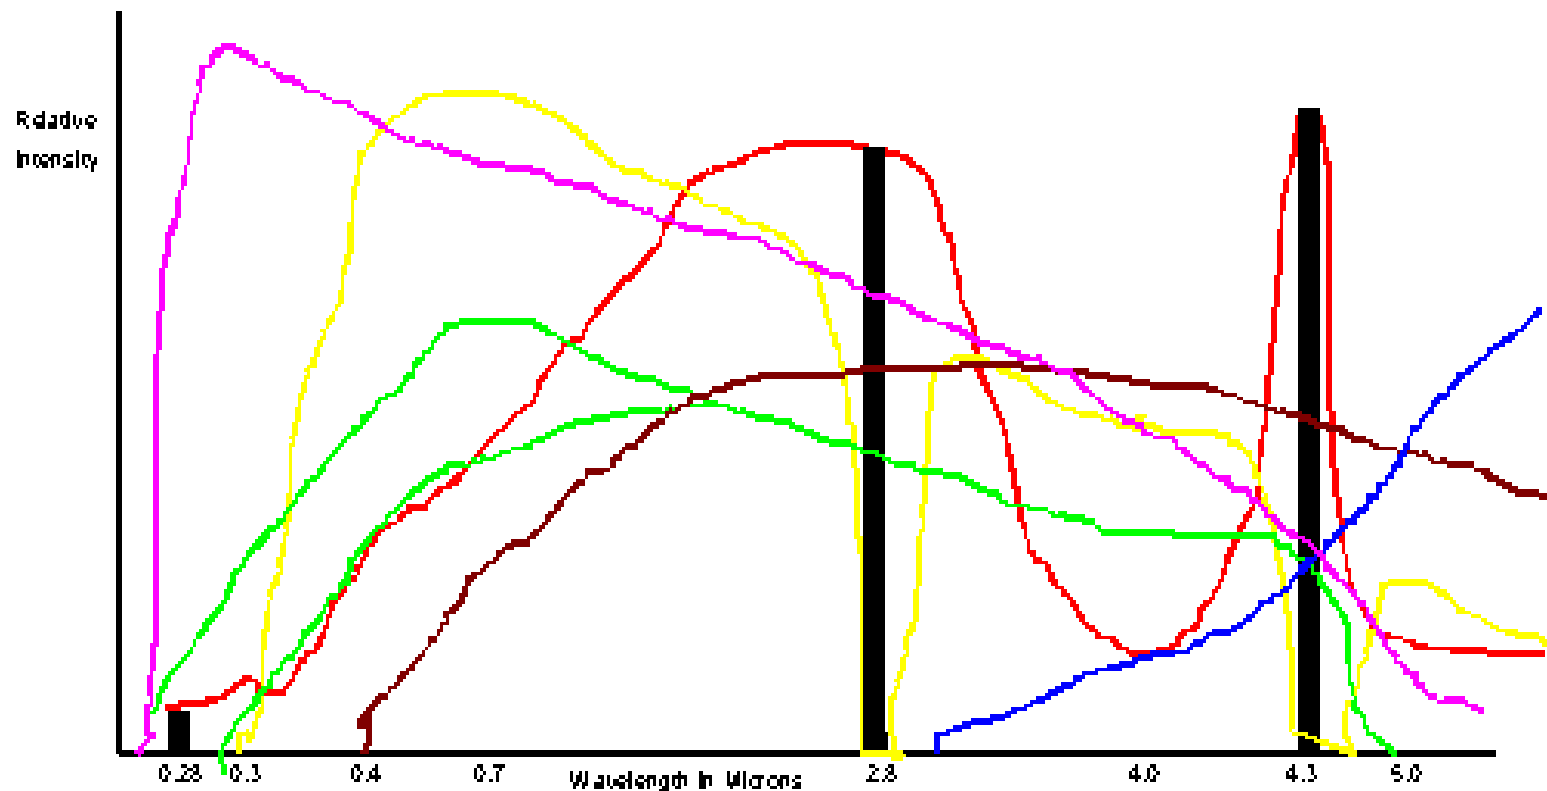



*keep an Eye on your safety*



## Are interferences present?

It is important to know if there are interferences present or that could emerge from the fire.

An inhibitor is a substance or vapour that blinds the detector. e.g.

- ❑ **UV detector** will be blinded by oil or grease on the lens, Hydrocarbon vapors (e.g. Xylene, Toluene), Chloride vapors etc.
- ❑ **IR detector** will be blinded by fog, water and ice or a salt layer on the lens (salt takes up water).
- ❑ **Multi IR** detector can be blinded or masked by blackbody radiation from hot machinery



*keep an Eye on your safety*



## Radiation Absorbing Materials

Some materials that affect flame detector sensitivity:

- |                         |                  |
|-------------------------|------------------|
| ❑ Grease, dust, dirt    | IR & UV absorber |
| ❑ Water, ice, steam     | IR & UV absorber |
| ❑ Oil                   | UV absorber      |
| ❑ Standard window glass | UV absorber      |
| ❑ Plastic films         | UV absorber      |





*keep an Eye on your safety*



## Nuisance Alarm Sources

- |                                   |         |
|-----------------------------------|---------|
| ❑ Welding (arc & gas)             | IR & UV |
| ❑ Corona and arcing               | UV      |
| ❑ Electric motor armatures        | UV      |
| ❑ Combustion engine backfire      | IR & UV |
| ❑ Black body radiation            | IR & UV |
| ❑ X-ray, nuclear radiation        | UV      |
| ❑ Hot turbines, reactors, boilers | IR      |
| ❑ Flare stacks                    | IR & UV |



*keep an Eye on your safety*



## Basis of Optical Flame Detection

- ❑ Spectral band selection (one or more)
- ❑ Flickering frequency analysis (2-30 Hz)
- ❑ Radiation intensity thresholds
- ❑ Detection Algorithm  
*(including mathematical techniques such as ratios, AND-gate comparisons, correlations and autocorrelations).*



*keep an Eye on your safety*



## Optical Sensors

- ❑ Flame Detector comprises one or more optical sensors, sensitive to radiation emitted at various wavelengths in different spectral bands.
- ❑ Most popular are UV and IR solid state sensors used alone or in various combinations to combat false alarms.

*keep an Eye on your safety*



## Optical Flame Detection

### Advantages:

- Detection distance
- Sensitivity
- Speed of response
- Reliability

### Disadvantages:

- Cost



*keep an Eye on your safety*



## General Considerations

### Application:

- ❑ Types of fire
- ❑ Sensitivity
- ❑ Speed of response
- ❑ Damage caused by false alarm
- ❑ Damage caused by undetected fire

### Environment:

- ❑ Background radiation
- ❑ Optical Interference



*keep an Eye on your safety*



## Single IR Flame Detection

### Advantages:

- ❑ Low Cost

### Disadvantages:

- ❑ Subject to false alarms  
(in the presence of flickering IR sources)
- ❑ Poor detection performance for stable flames

Reference fire – 15m max



*keep an Eye on your safety*



## UV Flame Detection

### Advantages:

- Unaffected by solar radiation
- Unaffected by hot objects
- Low cost

### Disadvantages:

- Subject to false alarms from UV sources (arc welding, electrical sparks, halogen lamps)
- Blinded by thick smoke, vapors, grease and oil deposits on the detector's window



Reference fire – 15m max





*keep an Eye on your safety*



## Dual Optical Flame Detectors

- ❑ To limit false alarms caused by non-fire radiation sources, we use several optical sensors, filtering specific spectral bands along with advanced mathematical algorithms.
- ❑ Dual Optical Flame Detectors employ either IR/IR or UV/IR sensors.



*keep an Eye on your safety*




## Dual UV/IR Flame Detectors

Two types of UV/IR optical flame detectors are available, each comprising a solar blind UV sensor and an IR sensor selected from one of the following:

- 2.7  $\mu\text{m}$  IR sensor (detects  $\text{H}_2\text{O}$  radiation)
- 4.3  $\mu\text{m}$  IR sensor (detects  $\text{CO}_2$  radiation)

Reference fire – 15m max

*keep an Eye on your safety*

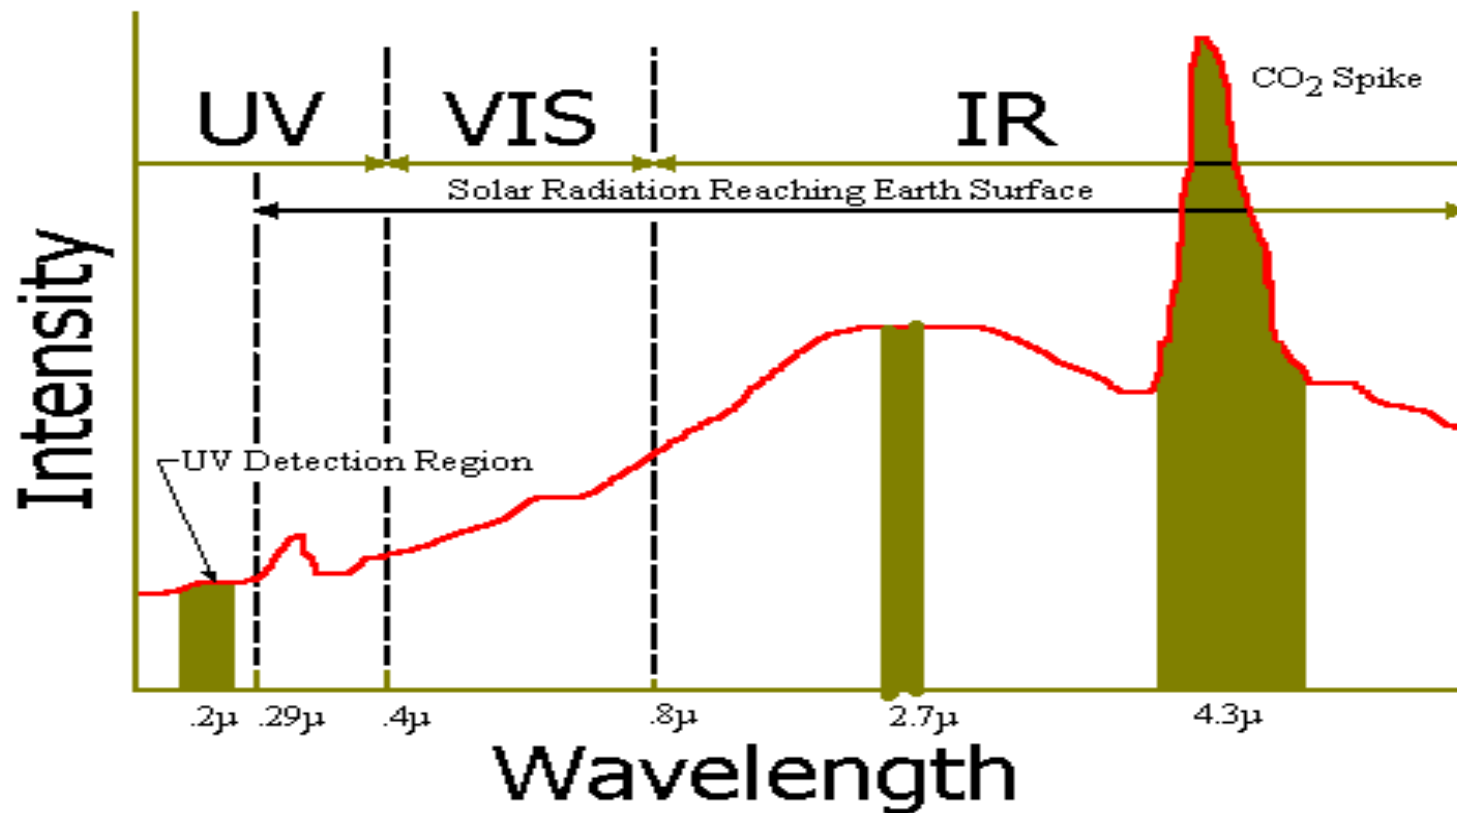

Detection of the simultaneous existence of characteristic infrared and ultraviolet radiation

*keep an Eye on your safety*



## UV/IR Flame Detection

### Advantages:

- ❑ Very low false alarm rate
- ❑ Unaffected by solar radiation

### Disadvantages:


- ❑ Blinded by thick smoke, vapors, grease and oil deposits on the detector's window
- ❑ Moderate cost



*keep an Eye on your safety*



## IR/IR Flame Detection

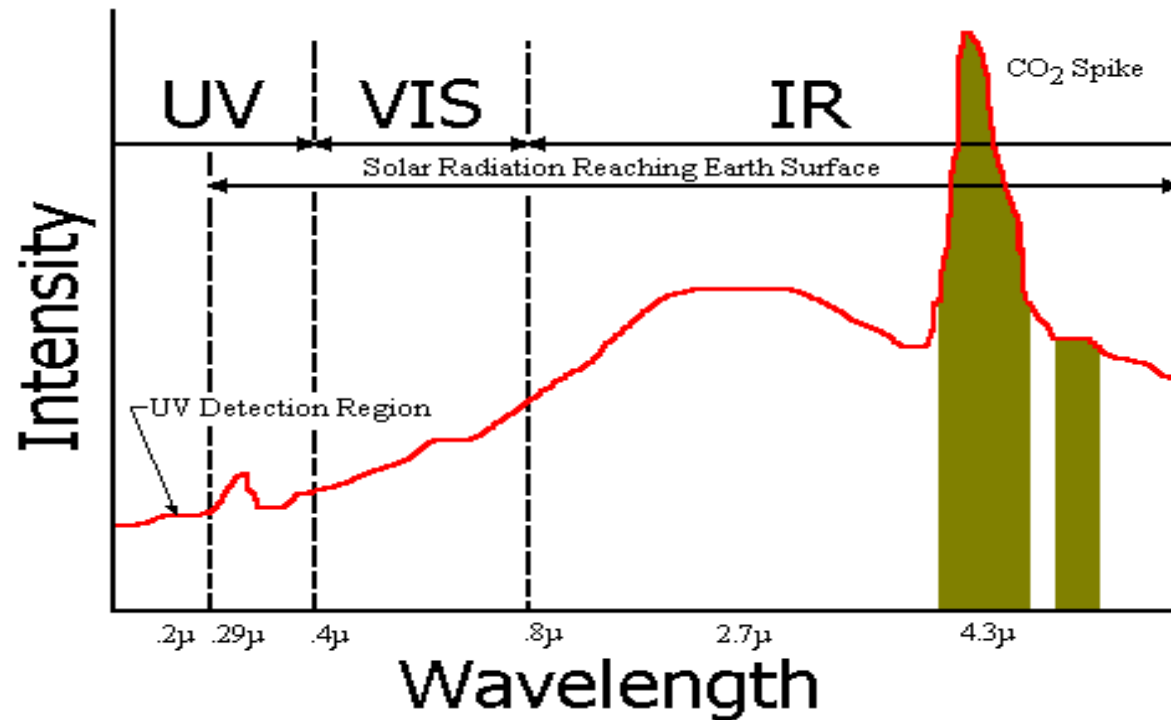

Detects the flame's characteristic infrared radiation at two different wavelengths



*keep an Eye on your safety*



## IR/IR Flame Detection

### Advantages:

- ❑ Moderate false alarm rate

### Disadvantages:


- ❑ Affected by IR sources
- ❑ Moderate cost

Reference fire – 15m max

*keep an Eye on your safety*



## Triple IR (IR3) Flame Detection

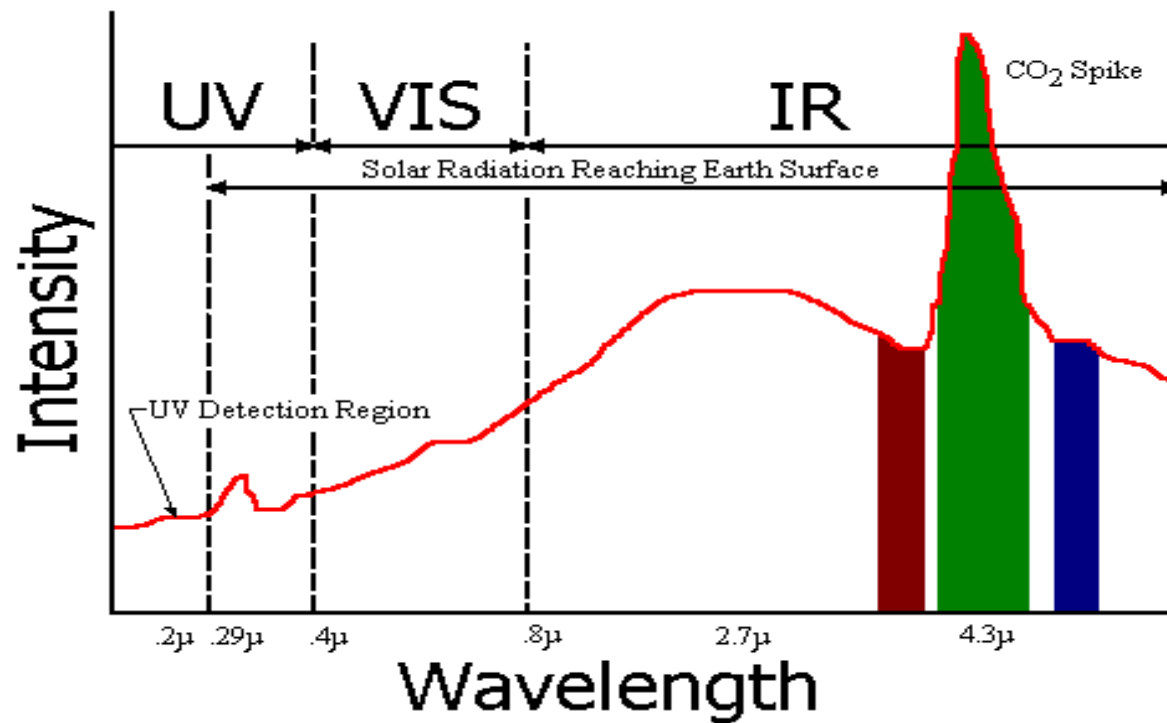

Detection of the flame's characteristic CO<sub>2</sub> emission line by the use of three wavelength bands



*keep an Eye on your safety*



## IR3 Flame Detection

### Advantages:

- ❑ Highest immunity to false alarms
- ❑ Highest Sensitivity
- ❑ Longest detection range

### Disadvantages:

- ❑ Higher cost

Reference fire – 65m max



*keep an Eye on your safety*



## Multi IR – Combined Hazard Detection

- ❑ Until now, invisible Hydrogen flames could only be detected using UV or UV/IR detectors and limited to only 5 - 10m detection range.
- ❑ Now an IR3 solution combines to offer a single detector that can detect hydrocarbon **and** hydrogen fires – and at significantly improved distances

N-heptane – 65m

Methane – 30m

Hydrogen – 30m



*keep an Eye on your safety*



## Multi IR – Combined Hazard Detection

- ❑ This new detector utilises a 4-IR sensor combination
  - one sensor each for HC and H<sub>2</sub> flame detection  
plus
  - two reference sensors common to both.
  
- ❑ Virtually same spec as IR3 with all the benefits of long distance detection and the highest false alarm immunity





*keep an Eye on your safety*



## The Detector Choice

- Single UV
- Single IR
- Dual UV/IR (2 types)
- Triple IR (IR3)
- Multi IR

All from Spectrex!